

KAPTIV[®]-MD

Electronic zero air loss condensate drain

PRODUCT FEATURES

The KAPTIV-MD is a zero air loss drain designed for smaller compressed air applications.

The KAPTIV-MD incorporates the reliable JORC direct acting valve assembly with FPM seals, offering a pressure range of 0 to 16 bar (up to 230 PSI).

The solid and robust aluminium housing design of the KAPTIV-CS has also been incorporated in to this model.

With an inlet connection height of only 74 mm this is an incredibly compact solution with unrivaled installation versatility and reliability. The weight of the KAPTIV-MD is 0.5 kgs.!

The maximum compressor capacity of this drain is 10m³/min (350 CFM) and typical draining applications include fridge dryers and filters - mainly due to its incredible compact size.



Mini Drain!

COMMERCIAL BENEFITS

- Extremely compact and lightweight unit.
- True zero air-loss solution.
- One Model covers all compressor capacities up to 10 m³/min.
- No sizing chart required, offering stocking advantages.
- The serviceable valve offers maintenance opportunities.
- Personal branding opportunities.

TECHNICAL ADVANTAGES



- Zero air-loss during the condensate discharge.
- Easy to install due to its low inlet height.
- External valve position allows for fast and easy maintenance.
- Direct acting valve with FPM (Viton) seal.
- Robust corrosion resistant aluminium housing.
- A large integrated mesh strainer.
- Incorporating a smart-self-cleaning valve modus.

Remove unreliable (diaphragm operated) drains and replace them with a reliable and professional solution – the KAPTIV-MD.


KAPTIV[®]-MD

Electronic zero air loss condensate drain

DIMENSIONS (MM)

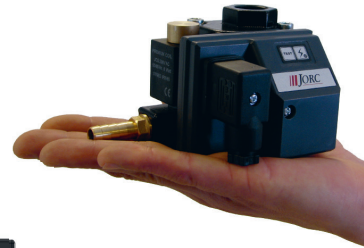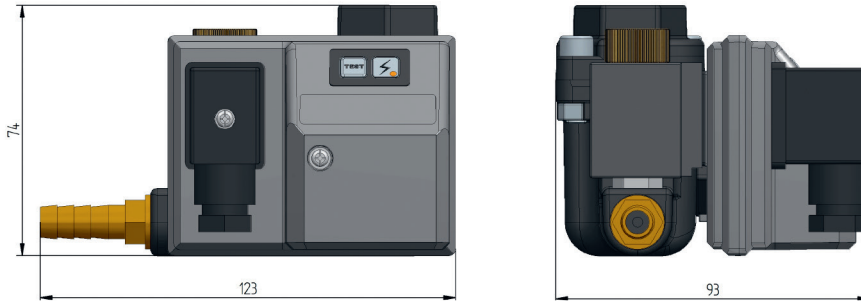

Incredibly compact!



Integrated mesh filter


SPECIFICATIONS

Maximum compressor capacity	10 m ³ /min.
Min./max. system pressure	0 bar / 16 bar
Valve type	2/2 way, direct acting
Valve orifice	2.0 mm
Valve seals	FPM
Inlet connection	1/2" (BSP or NPT)
Outlet connection	1/4" (BSP or NPT)
Inlet height	7.4 cm
Minimum medium temperature	1° C
Maximum medium temperature	50° C
Supply voltage options	230VAC / 115VAC 24VAC / 24VDC
Connector	DIN 43650-B
Serviceable valve	Yes
TEST feature	Yes
Environmental protection	IP65 (NEMA4)
Integrated mesh strainer	Yes
Alarm	Yes, LED indication only.
For external alarm options please see the KAPTIV-CS range.	




JORC's direct acting valve assembly, offering you reliability.

Quick disassembling to service the drain – standard tools required.



1. Remove the electronic module



2. Remove the valve shaft



3. Direct access to the valve orifice

JORC is ISO 9001:2008 Certified



Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

JORC Industrial BV
Pretoriastraat 28
NL-6413 NN Heerlen
The Netherlands

Tel +31 45 524 24 27
Fax +31 45 524 19 79
e-mail info@jorc.nl
Web www.jorc.eu